Light Sky Professional Produkte 2007



Light Sky Professional Produkte 2007

LIGHT SKY
PROFESSIONAL SHOW LIGHTING

LIGHT SKY 电光特


MODEL: BL150+

150W 电脑摇头灯
MOVING HEAD 150W



技术参数 SKILLSPECIFICATIONS

Power(电压):220V/50Hz
(The other power can order)
Lamp(灯泡):NSD 150
Power Consumption(耗电量):200W
Control Signal(控制信号): DMX 512
Control Channels(控制通道):8CH(BL150+) 7CH(BL150)
Carton Size(纸箱尺寸):L385*W355*H445(mm)
N.W(净重):13.5KG
G.W(毛重):15.5KG
Motors(马达数):6



GOBO SIZE

	White GOBO
	Metal GOBO
	Glass GOBO

性能特点

⊙ 8种色彩,可做双向高速彩虹及慢速滚动效果
⊙ 8种颜色图案,可做快、慢速流水滚动效果,平滑、
⊙ 图案内转动能,快速、慢速、正转、反转自由调节
(仅BL150+)
⊙ 机械线性 调光及1-7次/秒频闪效果
⊙ 水平45度,垂直252度扫描范围动作平滑、流畅、
定位准确
⊙ 水平、垂直运动位置可精确调整。(可原底此通道
功能,有8通道变成8通道)
⊙ 可选择内置音乐触发及自组联机按内部程序工作,
简不需外部控制器
⊙ 两只对流风扇设计,内部优化风路设计,散热充分良好
⊙ 符合各种安全标准, IP20保护等级,电源线符合
CE20/22标准


PERFORMANCE TRAIT

⊙ 8 colors, achieving high speed double way rainbow and scrolling effect
⊙ 8 changeable patterns(include 2 glass patterns),achieving freely adjusting fast and low speed flowing water scrolling effect, smooth scanning action and quiver at no time
⊙ Pattern internal rotting function, freely adjusting fast,low speed, clockwise and anticlockwise（Only BL150+）
⊙ Mechanical linear DIMMER and 1-7 times/s STROBE effect
⊙ Horizontal 450° and vertical 252° scanning range, smooth scanning action and accurate orientation
⊙ Precise adjustment on horizontal and vertical position.
（ carrsbred this channel function, 8channels change into 6 channels)
⊙ Music startup and self group online runs according to the building program, no need of external controller
⊙ 2 convection cooling-fan,optimize internal air duct way,heat elimination rapidely
⊙ Accord to vairety safty standard, IP20, power line accord to CE20/22

MODEL: BL150

150W 电脑摇头灯
MOVING HEAD 150W







BL150+ DMX Channel Control

1	色彩（冷孔） Color
2	图案 GOBO
3	图案自转 GOBO Rotate
4	调光/频闪/调光 Dimmer /Strobe /Stopper
5	X轴 Pan
6	Y轴 Tilt
7	X轴微动 Pan Fine
8	Y轴微动 Tilt Fine

BL150 DMX Channel Control

1	色彩（冷孔） Color
2	图案 GOBO
3	NOP
4	调光/频闪/调光 Dimmer /Strobe /Stopper
5	X轴 Pan
6	Y轴 Tilt
7	X轴微动 Pan Fine
8	Y轴微动 Tilt Fine





Light Sky Professional Produkte 2007



Light Sky Professional Produkte 2007

LIGHT SKY
PROFESSIONAL SHOW LIGHTING

MODEL: BL2508

250W 电脑摇头灯
MOVING HEAD 250W



SKILLSPECIFICATIONS

Power(电压):220V/50Hz(The other power can order)
Lamp(灯泡):HSD 250
Power Consumption(耗电量):400W
Control Signal(控制信号): DMX 512
Control Channels(控制通道):10CH
Double Flycase Size(双灯航空箱尺寸):L870*W510*H750(mm)
Single Flycase Size(单灯航空箱尺寸):L510*W450*H750(mm)
Carton Size(纸箱尺寸):L490*W450*H630(mm)
N.W(净重):23.5KG
G.W(毛重):27KG
Motors(马达数):9




PERFORMANCE TRAIT


- 8 colors, achieving high speed double way rianbow and scrolling effect
- pattern internal light rotating function, freelyadjusting fast, low speed, clockwise and anticlockwise
- **BL2508** 8 kinds of changable patterns (including 3 ripple patterns and 4 metal parrrens and 1 white light)
- **BL2808** 8 kinds of changable patterns (including 3 ripple patterns and 4 metal parrrens and 1 white light)
- Mechanical light adjustment and 1-10 times/s strobo effect
- Horizontal direction 450° scanning, smoothscanning action and accurate orientation Vertion 270° scanning, smooth scanning action and accurate orientation
- Prism effect
- Automatic focusing function
- DMX512 international digit display
- Compatible with DMX512 international digital signal
- 2 convection cooling-fan, optimize internal air duct way, heat elimination rapidely
- Accordto vairety safty standard, IP20, power line accord to CE20/22

MODEL: BL2808

250W 电脑摇头灯
MOVING HEAD 250W







GOBO SIZE	
White GOBO	
Metal GOBO	
Glass GOBO	



Light Sky Professional Produkte 2007



Light Sky Professional Produkte 2007

LIGHT SKY
PROFESSIONAL SHOW LIGHTING

MODEL: MH8857

575W 电脑摇头灯
MOVING HEAD 575W





SKILLSPECIFICATIONS

技术参数

Power(电压):220V/50Hz
(The other power can order)
Lamp(灯泡):HMI 575W
Power Consumption(机电量):680W
Control Signal(控制信号):DMX 512
Control Channels(控制通道):10 CH
Single Flycase Size(单灯航空箱尺寸):
L515*W450*H750(mm)
Double Flycase Size(双灯航空箱尺寸):
L840*W530*H950(mm)
Carton Size(纸箱尺寸):L470*W430*H590(mm)
N.W(净重):29KG
G.W(毛重): 30.5KG
Motors(马达数):9








性能特点

- 八种颜色，可作高速双向彩虹及滚动效果
- 八种可更换图案（含一块玻璃图案），可按要求定作标志，特殊图案
- 图案内转动能，快速，慢速，正转，反转自由调节
- 机械线性调光及1-7次/秒频闪效果
- 水平方向270度扫描，扫描动作平滑，定位准确
- 垂直方向270度扫描，扫描动作平滑，定位准确
- 水平运动位置微步调整（可屏蔽此通道功能）
- 垂直运动位置微步调整（可屏蔽此通道功能）
- 三棱镜及棱镜正、反自由旋转功能
- 图案投射远近清晰度自动对焦功能
- 二只对流风扇散冷，内部优化风路设计，散热充分良好
- DMX通道数据码盘显示
- 可选择音乐触发及自组联机板内置程序工作

PERFORMANCE TRAIT

- 6 colors, achieving high speed double way rainbow and scrolling effect
- 8 kinds of changeable patterns (including 1 glass pattern), customer-oriented signal and special patterns are available
- Pattern internal rotting function, freely adjusting fast, low speed, clockwise and anticlockwise
- Mechanical light adjustment and 1-7 times/s strobo effect
- Horizontal 370° scanning range, the scanning action is smooth, accurate orientation
- Vertical 270° scanning range, the scanning action is smooth, accurate orientation
- Micro-adjustment on horizontal action (shielding this channel function is possible)
- Micro-adjustment on vertical action (shielding this channel function is possible)
- Prism and clockwise and anticlockwise rotating function
- Automatic focusing function
- 2 convection cooling-fan, optimize internal air duct way, heat elimination rapidely
- DMX channel digit display
- Music startup and self group online runs according to the building program









Light Sky Professional Produkte 2007



Light Sky Professional Produkte 2007

MODEL:BS2506

250W

SCAN 250W




SKILL SPECIFICATIONS


Power	220V/50Hz
Lamp	
Philips:MSD250	(farbtemp): 6700K
MSD250/2	(farbtemp): 8500K
Osram:HSD250/60	(farbtemp): 6000K
HSD250/78	(farbtemp): 7800K
Power Consumption	:350W
Control Signal	: DMX 512
Control Channels	:6 CH(16bit)
Motors	6
Carton Size	:L750*W320*H315(mm)
N.W	2KG
G.W	3.5KG

GOBO SIZE

	White GOBO	Overall:Φ29.2mm / Image:Φ23.5mm
	Metal GOBO	Overall:Φ29.2mm / Image:Φ23.5mm
	Glass GOBO	Overall:Φ29.2mm / Image:Φ23.5mm

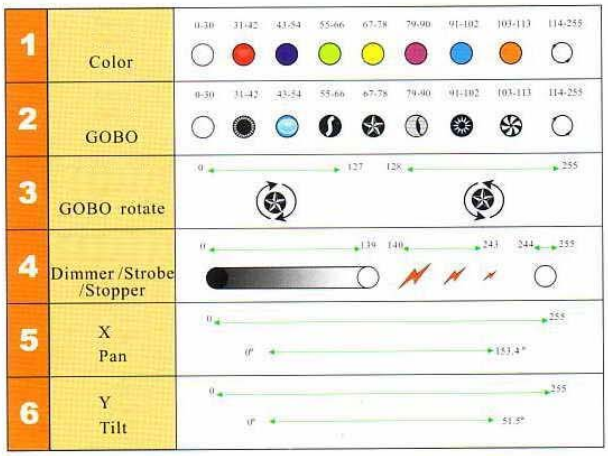



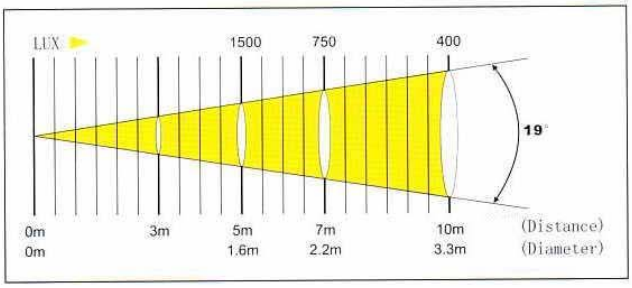

PERFORMANCE TRAIT

- ⊙ 8 colors, achieving high speed double way rainbow and scrolling effect
- ⊙ 8 kinds of changeable patterns (including 2 glass patterns), customer-oriented signal and special patterns are available
- ⊙ Pattern internal rotting function, freely adjusting fast, low speed, clockwise and anticlockwise
- ⊙ Mechanical linear DIMMER and 1-7 times/s STROBE effect
- ⊙ Horizontal 153.4° and vertical 51.5° scanning range, smooth scanning action and accurate orientation Precise adjustment on horizontal and vertical position
- ⊙ DMX channel digit displays address code and using time.
- ⊙ Setting and storing the address and function codes by pressing the buttons
- ⊙ Music startup and self group online runs according to the building program,no need of external controller
- ⊙ 2 convection cooling-fan,optimize internal air duct way, heat elimination rapidely
- ⊙ Compatible with DMX 512 international digital signal
- ⊙ PFC power factor compensation.
- ⊙ According to various kinds of safety standards, IP20 protect grades, The cable accords to the CE20/22 standard



Light Sky Professional Produkte 2007




LIGHT SKY
PROFESSIONAL SHOW LIGHTING

MODEL: ML--36
36W LED
MOVING LED




SKILL SPECIFICATIONS

POWER 190V-240V
POWER CONSUMPTION 36W
Lamp：LED 1WX36
Motors : 2
N.W : 6.75KG



PERFORMANCE TRAIT

1.ML-36 is installed with 36 LED, the power of every LED reaches 1W
2.The average service life of every LED reaches 100000 hours
3.Low power consumption
4.Super luminance, with the efficiency of ordinary power bulbs , rich and splendid color
5.DMX-512 control signal, 12 standard channels
6.The housing is made of streamline fashionable PC engineering plastic after once casting
7.Wide range super micro smooth scanning, horizontal scanning angle reaches 540□ and vertical 265□, the scanning precision reaches 8bit and 16bit, with smooth and precise positioning, additionally, the scanning speed is adjustable
8.Infinite RGB color mixing system
9.The light beam angle is adjustable ranging 15°-25°
10.High speed electronic strobe reaches 1-18 times/second
11.Total light adjustment control channel can control 3 main color channels simultaneously
12.The digital display on the control panel can be reversed for 180° applicable for horizontal or vertical use of moving head
13.With automatic run function, music control function, the 8 built-in programs can be activated with DMX control
14.Meet CE standard, UL standard and GB7000.152000 standard.

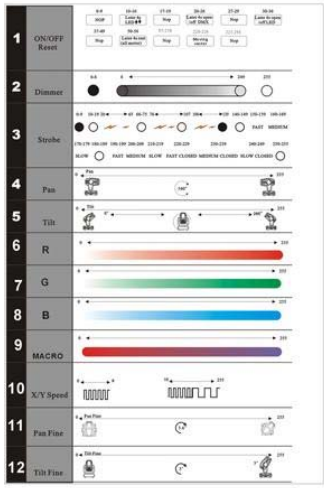










Light Sky Professional Produkte 2007

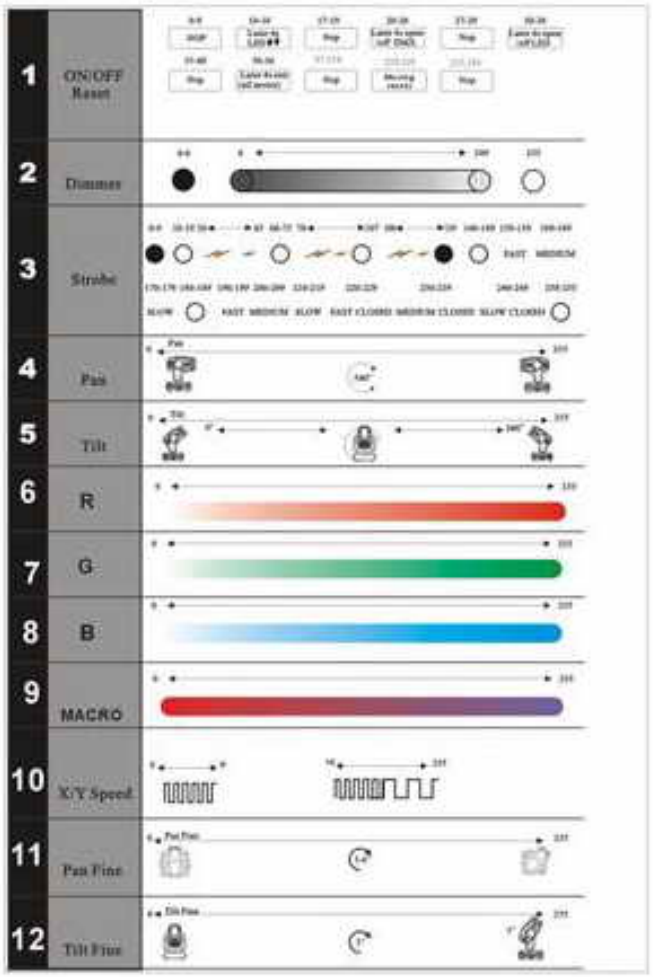


PERFORMANCE TRAIT

1.ML-36 is installed with 36 LED, the power of every LED reaches 1W
2.The average service life of every LED reaches 100000 hours
3.Low power consumption
4.Super luminance, with the efficiency of ordinary power bulbs , rich and splendid color
5.DMX-512 control signal, 12 standard channels
6.The housing is made of streamline fashionable PC engineering plastic after once casting
7.Wide range super micro smooth scanning, horizontal scanning angle reaches 540° and vertical 265°, the scanning precision reaches 8bit and 16bit, with smooth and precise positioning, additionally, the scanning speed is adjustable
8.Infinite RGB color mixing system
9.The light beam angle is adjustable ranging 15°--25°
10.High speed electronic strobe reaches 1-18 times/second
11.Total light adjustment control channel can control 3 main color channels simultaneously
12.The digital display on the control panel can be reversed for 180° applicable for horizontal or vertical use of moving head
13.With automatic run function, music control function, the 8 built-in programs can be activated with DMX control
14.Meet CE standard, UL standard and GB7000.152000 standard.


LIGHT SKY
PROFESSIONAL SHOW LIGHTING

MODEL: RC1200
1200W 电脑聚光染色灯
COLOR SOPT 1200W









技术参数 SKILL SPECIFICATIONS

Power(电压):220V/50Hz
(The other power can order)
Lamp(灯泡):64756 CP/93 220V/1200W
Power Consumption(耗电量):1300W
Control Signal(控制信号):DMX 512
Control Channels(控制通道):3 CH
Double Flycase Size(底空箱尺寸):L950*W610*H530(mm)
Carton Size(纸箱尺寸):L730*W470*H330(mm)
N.W(净重):15.3KG
G.W(净重):18KG
Motors(马达数):2





性能特点

- 采用新型铝合金及压模钢板组合外形设计，美观大方
- 两个色彩轮，其中一个色彩轮有8个色彩，另一个有8个色彩，可组合出32种色彩
- 彩虹效果
- 频闪效果
- 电子线性无级调光
- 机械线性无级调光
- 控制时段3个
- 快捷、准确、稳定、无声的换色系统，完全解决机械换色的缺点
- 二只轴流风扇散冷，内部优化风路设计，散热充分良好
- 内置过热保护
- 符合各种安全标准，IP20保护等级，电源线符合CE20/22二级标准
- 适用于演播厅，舞台及流动演出，时装表演等场合

PERFORMANCE TRAIT

- Applying new type aluminum alloy and casting steel plate shell design
- Two color wheels, a color wheels have 8 colors and a color wheels have 8 colors ,achieving over 32 colors
- Rainbow effect
- Strobe effect
- Electronic linear infinite adjustment
- Controlling 3 loops
- Fast, accurate, stable and noiseless color changing system, best solution to mechanical color changing
- 2 convection cooling-fan,optimize internal air duct way,heat elimination rapidely
- Built-in over heat protection
- According to various kinds of safety standards, IP20 protect grades. The cable accords to the CE20/22 standard
- Suitable for studio, stage, performance and fashion performance

技术参数 SKILL SPECIFICATIONS

Power(电压):220V/50Hz
(The other power can order)
Lamp(灯泡):HMI 575W/HR
Power Consumption(耗电量):680W
Control Signal(控制信号):DMX 512
Control Channels(控制通道):3 CH
Double Flycase Size(底空箱尺寸):L950*W610*H530(mm)
Carton Size(纸箱尺寸):L730*W470*H330(mm)
N.W(净重):24.5KG
G.W(净重):27.5KG
Motors(马达数):4






PERFORMANCE TRAIT

- Applying new type aluminum alloy and casting steel plate shell design
- Two color wheels, a color wheels have 8 colors and a color wheels have 8 colors ,achieving over 32 colors
- Rainbow effect
- Strobe effect
- Mechanical linear infinite adjustment
- Controlling 3 loops
- Fast, accurate, stable and noiseless color changing system, best solution to mechanical color changing
- 2 convection cooling-fan,optimize internal air duct way,heat elimination rapidely
- Built-in over heat protection
- According to various kinds of safety standards, IP20 protect grades. The cable accords to the CE20/22 standard
- Suitable for studio, stage, performance and fashion performance




MODEL: RC575
575W 电脑聚光染色灯
COLOR SOPT 575W





性能特点

- 采用新型铝合金及压模钢板组合外形设计，美观大方
- 两个色彩轮，其中一个色彩轮有8个色彩，另一个有8个色彩，可组合出32种色彩
- 彩虹效果
- 频闪效果
- 机械线性无级调光
- 控制时段3个
- 快捷、准确、稳定、无声的换色系统，完全解决机械换色的缺点
- 二只轴流风扇散冷，内部优化风路设计，散热充分良好
- 内置过热保护
- 符合各种安全标准，IP20保护等级，电源线符合CE20/22二级标准
- 适用于演播厅，舞台及流动演出，时装表演等场合



Light Sky Professional Produkte 2007

LIGHT SKY

PROFESSIONAL SHOW LIGHTING

LIGHT SKY 福禾特

MODEL: SH1200


1200W 电脑追光灯

FOLLOW SPOT 1200W

技术参数 SKILL SPECIFICATIONS

Power(电压):220V/50Hz(The other power can order)
Lamp(灯泡):HMI 1200W/GS
Power Consumption(耗电量):1500W
Control Signal(控制信号):DMX 512
Control Channels(控制通道):4 CH
Flycase Size(飞空箱尺寸):L1310*W830*H480(mm)
Light body Carton Size(灯体纸箱尺寸):L1060*W470*H335(mm)
Controller Carton Size(控制箱纸箱尺寸):L490*W380*H100(mm)
N.W(净重):39KG
G.W(净重):43KG
Motors(马达数):5







性能特点

- 采用新型铝合金及压模钢板组合外形设计，美观大方
- 两个颜色轮，可组合多达20种色彩
- 彩虹效果
- 电子线性无级调整光圈大小
- 频闪、调光、开合光闸一体化设计
- 寻回色温效果
- 光束角度15度，投射距离30米
- 控制面板按键、推子相结合，直观易用
- 单台联机使用时，由主控手指供实现同步变化，也可按DMX512控台，可免除因控制人员相互通话沟通的不便
- 重心准确及灵活角度可调的控制面板使得操作极为简便，准确
- 三只轴流风扇设计，内部优化风路设计，排热充分良好
- 内置过热保护，触发高压保护
- 控制通道4个
- 按空DMX512国际标准数码信号
- PFC功率因素补偿
- 符合各种安全标准，IP20保护等级
- 电源线符合CE20/22二级标准
- 适用于大型舞台、体育馆、娱乐场所、多功能演艺厅及通断科等场合

PERFORMANCE TRAIT

- Applying newtype aluminum alloy and casting steel plate shell design
- Two color wheels, achieving over 20 colors
- Rainbow effect
- Electronic linear infinite adjustment
- Strobe effect, light adjusting integration design
- Color temperature effect
- The lamp beam angle reaches 15° with the jetting distance 30m
- Key and push-pull switch integration, easily use
- When using online service, achieving synchronous changes through main controller or connecting the DMX512 controlling table so as to avoid the inconvenience caused by operator communication
- Accurate barycenter, flexible and adjustable controlling panel make the operation easy and accurate
- 3 convection cooling-fan optimize internal air duct way, heat elimination rapidly
- Built-in over heat protection and high voltage protection
- Controlling 4 channels
- Compatible with DMX512 international digital signal
- PFC power factor compensation
- According to various kinds of safety standards, IP20 protect grades
- The cable accords to the CE20/22 standard
- Suitable for stage, performance and entertainment occasions as well as the multi-functional studio and Disco

MODEL: CP2502

250W 电脑染色灯

COLOR 250W

技术参数 SKILL SPECIFICATIONS

Power(电压):220V/50Hz
(The other power can order)
Lamp(灯泡):HSD 250
Power Consumption(耗电量):320W
Control Signal(控制信号):DMX 512
Control Channels(控制通道):2 CH
Carton Size(纸箱尺寸):L500*W315*H250(mm)
N.W(净重):15KG
G.W(净重):12KG
Motors(马达数):2





GOBO SIZE

White GOBO

Metal GOBO

性能特点

- 8个颜色可作高速单向滚动效果及正反转七彩光间步跳变换
- 可调光/频闪/间闪
- 5种静态图案
- 两只对流风扇排冷，内部优化风路设计，散热充分良好
- 符合各种安全标准，IP20防护等级，电源线符合CE20/22二级标准

PERFORMANCE TRAIT

- 8 colours, achieving high speed double way rainbow and 7 colors scroling effect
- Tune light / dodging / Strobo
- 5 changeable patterns
- 2 convection cooling-fan, optimize internal air duct way, heat elimination rapidly
- According to variety safty standard, IP20, power line accords to CE20/22

LIGHT SKY

PROFESSIONAL SHOW LIGHTING

LIGHT SKY 福禾特

MODEL: GL—2066

激光灯

LASER LIGHT



性能特点

- 体积小，重量轻，寿命长，免维护，低消耗，几动画，2种特技，二维投射，文字图案，有情人每个，旋转，翻滚，平移，缩放等，变形等效果，适用于中、高档迪斯科及各种演出场所
- 控制方式：DMX512 signal / Sound control DMX512信号/声控
- 32CH通道
- 扫描角度：PAN（450°）/ TILT（252°）
  PAN（60°至450°），TAN（0°至252°）

PERFORMANCE TRAIT

- This light has the following features and function such as small volume, light weight, long using life, less maintenance, low consumption, animated and three-dimensional trick, 3D casting, words pattern and Zoom, rotative, roll and smooth move, slow writing and shape Change, etc
- This light applies for middle and high-class disco halls and various different performing occasions

POWER:	220V/50Hz(the other power can order)
LAMP:	>800
BIOMETRY:	>500H
SCANANGLE:	90
CONTROL ANGLE:	SOUND CONTROL
LIGHT SIZE:	L370mm W270mm H440mm
LIGHT WEIGHT:	14.6 KG









MODEL: GL—2032

激光灯

LASER LIGHT



性能特点

- 采用大容量高速单片机，先进的算法程序设计，内置十种图形动画效果
- 采用精密的进步电机，大角度扫描
- 采用高效的光学反射镜
- 有变焦、缩放、旋转图案，对光精准，激光镜像等效果

PERFORMANCE TRAIT

- Built-in large capacity and high speed singlechip MCU, advanced design program, Put in several kind of cartoons effects inside
- Built-in ninety step motor, big angle scaning
- Using high efficiency reflector
- Showing trasformation, zoom, rotation and other effects

POWER:	220V/50Hz(the other power can order)
LAMP:	>800
BIOMETRY:	>500H
SCANANGLE:	90
CONTROL ANGLE:	SOUND CONTROL
LIGHT SIZE:	L640mm W320mm H270mm
LIGHT WEIGHT:	10 KG









Light Sky Professional Produkte 2007

LIGHT SKY
PROFESSIONAL SHOWLIGHTING

MODEL: GL-1026
激光灯
LASER LIGHT



性能特点

- 采用大容量高速单片机，先进的算法程序设计，内置十种图形动画效果
- 采用精密的进步电机，大角度扫描
- 采用高效的光学反射镜
- 任变换，缩放，旋转图案，时光隧道，激光瀑幕等效果

POWER:	220V/50Hz(the other power can order)
LAMP:	>30G
BIOMETRY:	>500H
SCAN ANGLE:	60°
CONTROL ANGLE:	SOUND CONTROL
LIGHT SIZE:	L430mm W250mm H250mm
LIGHT WEIGHT:	3.5KG

PERFORMANCE TRAIT

- Built-in large capacity and high speed singlechip MCU, advanced design program,Put in several kind of cartoons effects inside
- Built-in nicety step motor , big angle scaning
- Using high efficiency reflector
- Showing trasformation ,zoom,rotationand other effects






MODEL: GL-2050
激光灯
LASER LIGHT




性能特点


- 采用大容量高速单片机，先进的算法程序设计，内置十种图形动画效果
- 采用精密的进步电机，大角度扫描，三束光输出
- 采用高效的光学反射镜
- 任变换，缩放，旋转图案，时光隧道，激光瀑幕等效果

PERFORMANCE TRAIT

- Built-in large capacity and high speed singlechip MCU, advanced design program,Put in several kind of cartoons effects inside
- Built-in nicety step motor , big angle scaning. Three beams output
- Using high efficiency reflector
- Showing trasformation ,zoom,rotationand other effects

POWER:	220V/50Hz(the other power can order)
LAMP:	>1200R
BIOMETRY:	>500H
SCAN ANGLE:	60°
CONTROL ANGLE:	SOUND CONTROL
LIGHT SIZE:	L690mm W250mm H170mm
LIGHT WEIGHT:	6KG



LIGHT SKY
PROFESSIONAL SHOWLIGHTING

OSRAM	PHILIPS	JENBO (TAIWAN)
Power: 250W Model: HSD 250W	Power: 250W Model: MSD250/2	Power: 150W Model: MSD150
Power: 575W Model: HMI 575W	Power: 250W Model: MSD250	Power: 250W Model: MSH-250
Power: 1200W Model: 64756 CP/82	Power: 575W Model: HMI-575WF	Power: 575W Model: MSH-575W
Power: 2000W Model: HMI2500	Power: 1200W Model: MSR 1200 W/BS	Power: 1200W Model: MHG 1200

灯钩系列 Light Hook



光学组件 Reflector Glass



颜色盘 Color Glass



皮带 Belt



保险索 Safely rope

Model:SR 60



进步电机 Motor



GLASS GOBO



METAL GOBO



Light Sky Professional Produkte 2007

